




DOF.TSS-01

Two Stage Smart Seismic System

Seismic systems designed to against seismic ground motion at non-standart heights provide maximum durability. These systems offer specially engineered structural soutsions to minimize the effects of eathquakes, particularly tailored for non-standart building heights.

DOF.TSS-01 Two Stage Smart Seismic System

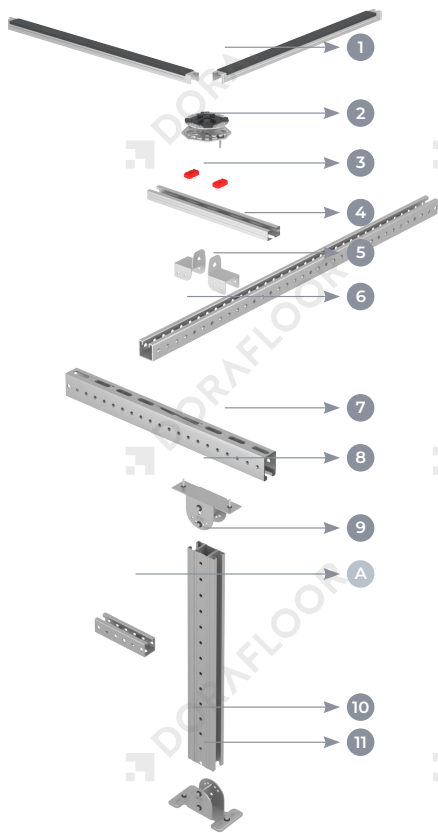

- 1 Galvanized Stringer
- 2 DOF.ST-01 or DOF.SH-01 Pedestal
- 3 Galvanized Steel Spring Nut
- 4 Galvanized Steel Beam 40x20x3mm
- 5 Galvanized Steel Corner Profile thickness 3mm
- 6 Galvanized Steel Beam 40x40x3mm
- 7 Galvanized Steel Beam 40x60x3mm
- 8 Galvanized Top Base for Heavy Duty
- 9 Galvanized Steel Smart Seismic Pedestal 40x80x3mm
- 10 Galvanized Steel Adjustable Lower Base
- 11 Galvanized Steel Screw
- A Galvanized Steel Beam 40x40x3mm* For Cable Tray

* Optional solutions that can be integrated into the substructure system, such as ventilation systems, cable trays, and pipe clamps. These components are evaluated by our technical team based on the project and included if necessary.

DOF.TSS-01 Two Stage Smart Seismic System delivers a fully integrated solution by incorporating ventilation, piping, and cabling systems within a single structure.

While seamlessly combining infrastructure systems with the raised flooring system, it also allows both systems to operate independently.

Depending on the project requirements, the cable management infrastructure can be configured using either the Cable Tray Console Pedestal to Pedestal or the Cable Tray Console solution.

